



MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077




Midi Relays (IEC Contactors) 100 AMP Resistive Relay

Could be used as a Single Pole, Two Pole or Three Pole Unit.

- 3-Pole (NO) Main Contact
- Finger Proof Design
- DIN-Rail or Screw Mountable
- 1NO1NC Auxiliary contacts built-in as standard
- Up to 1,800 Operations Per Hour
- Screw or Lug Terminal Types



- **Resistive Current (AC1):** 100 AMPS @ 690 VAC
- **Motor (AC3)**
 - **200-240 VAC:** 65 AMPS / 18.5 kW
 - **380-440 VAC:** 65 AMPS / 30 kW
 - **500-550 VAC:** 60 AMPS / 33 kW
 - **690 VAC Max:** 35 AMPS / 33 kW
- **Control Voltages:** 12 to 550 VC
- **Single Phase Motor AC 50/60Hz**
 - 110~120 VAC: 5HP
 - 220~240 VAC: 15HP
- **Three Phase Motor AC 50/60Hz**
 - 200~208 VAC: 25HP
 - 220~240 VAC: 30HP
 - 440~480 VAC: 50HP
 - 550~600 VAC: 60HP

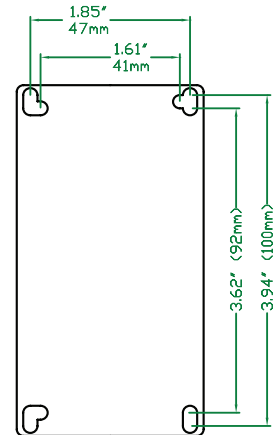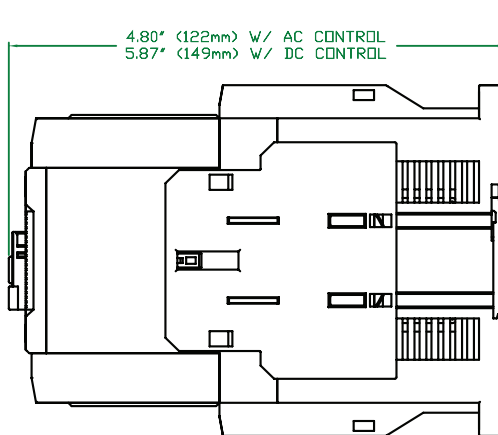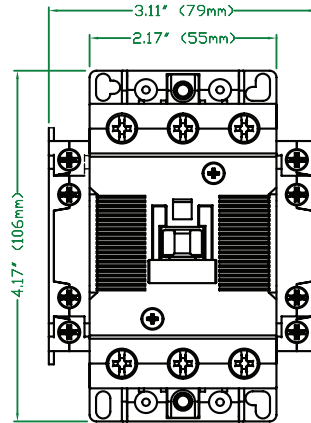

IEC Contactors

Model	Resistive Current	Terminal Type	Contact Voltage	Control Voltage
CC65LD12	100 AMPS	Lugs	690 VAC	12 VDC
CC65LD24	100 AMPS	Lugs	690 VAC	24 VDC
CC65LA24	100 AMPS	Lugs	690 VAC	24 VAC
CC65LA48	100 AMPS	Lugs	690 VAC	48 VAC
CC65LA110	100 AMPS	Lugs	690 VAC	110 VAC
CC65LA120	100 AMPS	Lugs	690 VAC	120 VAC
CC65LA220	100 AMPS	Lugs	690 VAC	220 VAC

Contactors - Relays - Switches

<http://www.mdious.com>