



MERCURY DISPLACEMENT INDUSTRIES, INC.


Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077

STANDARD MECHANICAL FLOAT

G, H, K, L, N, P & R SERIES

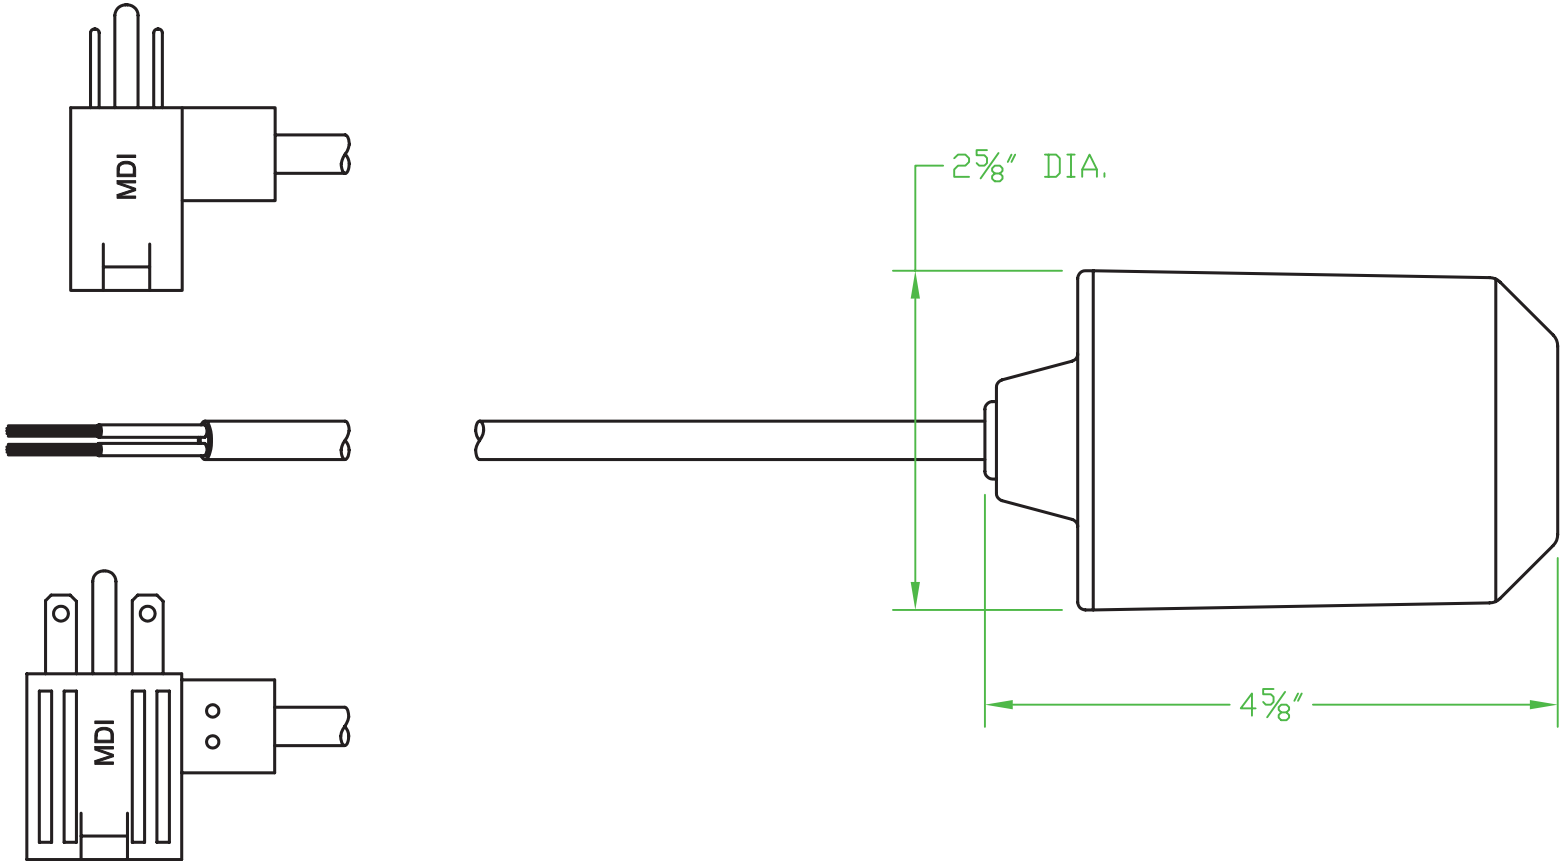

OPERATION ANGLE:

G, L & H SERIES: 90° WIDE ANGLE

N SERIES: 35° NARROW ANGLE

P SERIES: 25° NARROW ANGLE

K SERIES: 3.5" OPERATING DISTANCE

R SERIES: 2.5" OPERATING DISTANCE

RATINGS:

G, P, & R SERIES: ½ H.P. / 13 AMP @ 120/240 VAC

H SERIES: 1 H.P. @ 120 VAC / 2 H.P. @ 240 VAC 15 AMP @ 120/240 VAC

L SERIES: 25 AMP @ 120/240 VAC

K & N SERIES: ¼ H.P. / 10 AMP @ 120/240 VAC

SWITCH TYPES: NORMALLY OPEN, NORMALLY CLOSED OR DOUBLE THROW

FLOAT MATERIALS: HIGH IMPACT POLYSTYRENE (H.I.P.S.) RATED TO 140°F,
OR ACRYLONITRILE BUTADIENE STYRENE (A.B.S.) RATED TO 186°F.

CORD: SJOW (CPE) SJTOW (PVC)

CORD LENGTHS: UP TO 50 FEET. (LENGTHS IN EVEN FOOT INCREMENTS)

Contactors - Relays - Switches

<http://www.mdious.com>