



MERCURY DISPLACEMENT INDUSTRIES, INC.


Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077

STANDARD MERCURY FLOAT

E, C & D SERIES

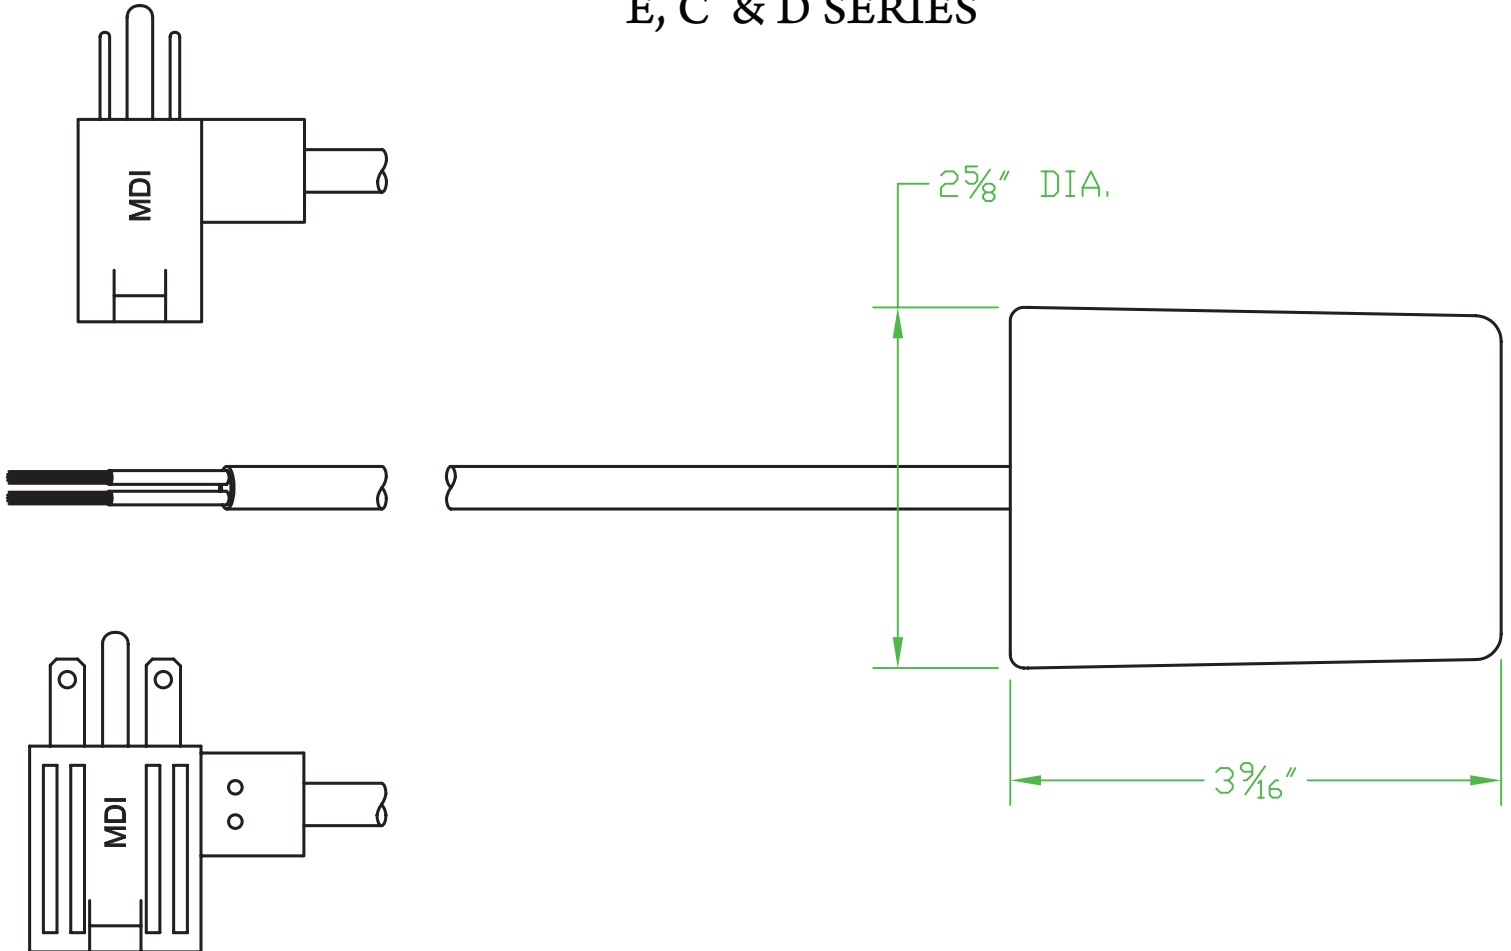

OPERATION ANGLE:

E SERIES: 90° WIDE ANGLE

D SERIES: 30° NARROW ANGLE

C SERIES: 10° NARROW ANGLE

RATINGS:

D & E SERIES: 13 AMP @ 120 VAC / 6 AMP @ 240 VAC / 43.2 AMP OVER LOAD

C SERIES: 13 AMP @ 120 VAC / 5 AMP @ 240 VAC

CONTACTS: NORMALLY OPEN OR NORMALLY CLOSED

FLOAT MATERIALS: HIGH IMPACT POLYSTYRENE (HIPS) RATED TO 140°F

CORD: SJOW (CPE) SJTOW (PVC)

CORD LENGTHS: UP TO 50 FEET. (LENGTHS IN EVEN FOOT INCREMENTS)

Contactors - Relays - Switches

<http://www.mdious.com>