




**MERCURY DISPLACEMENT INDUSTRIES, INC.**  
 Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710  
 Phone (269) 663-8574 - Fax (269) 663-2924  
 (800) 634-4077

# MECHANICAL DAMPER ARM SWITCH SP-1347

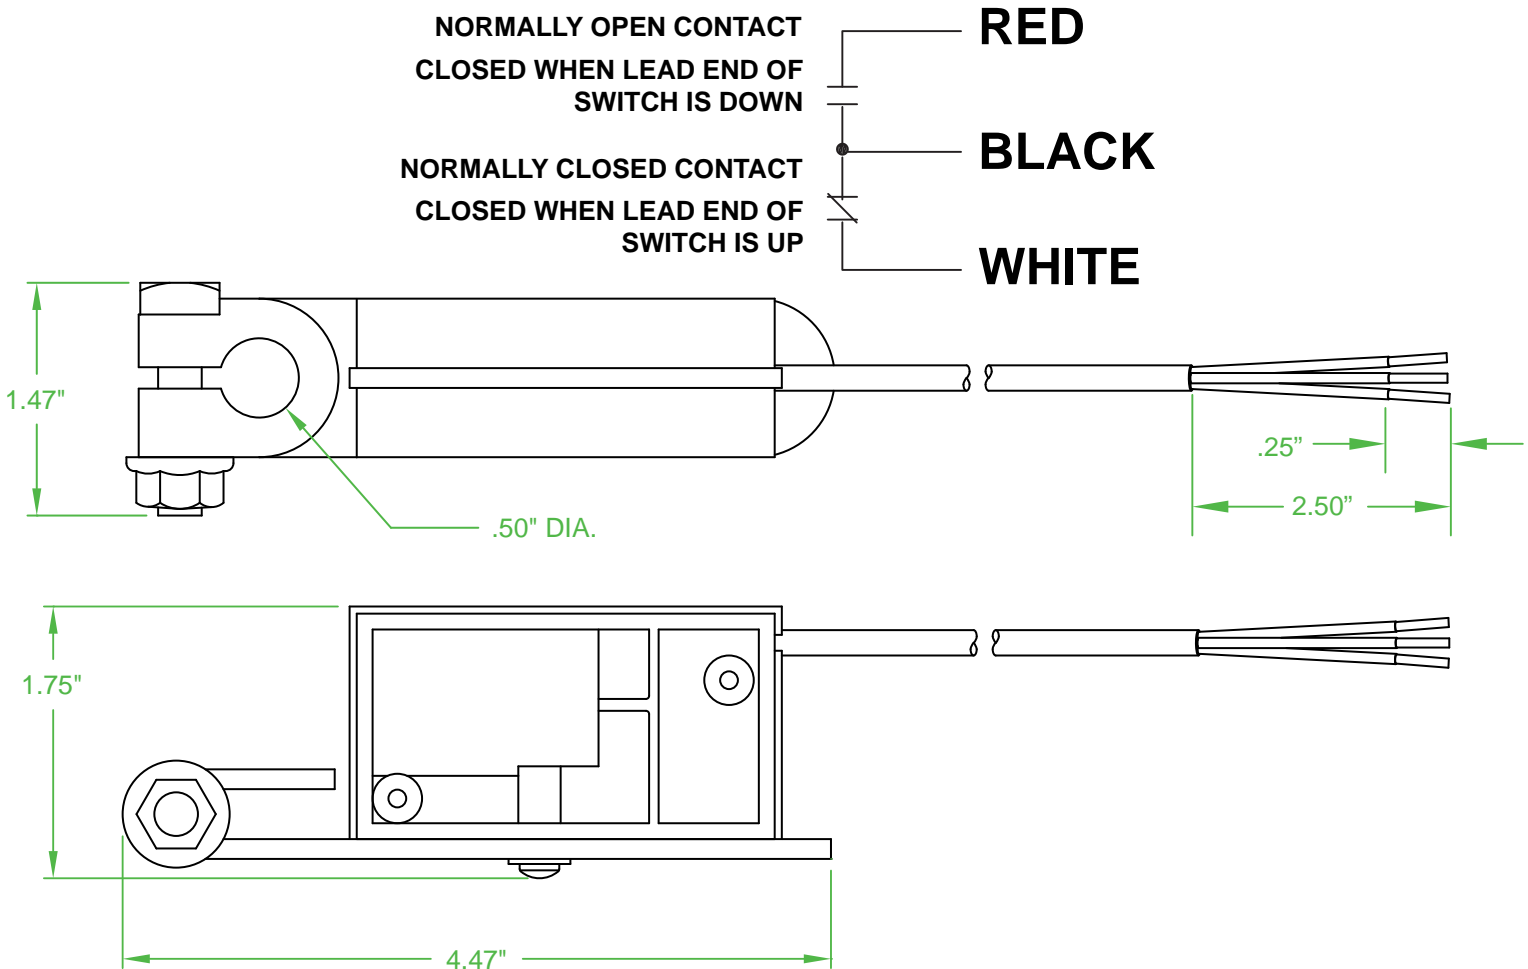

WIRE: 18/3 CMP/CL39 PLENUM WIRE

HOUSING MAT'L: GLASS FILLED PBT

BRACKET MAT'L: PLATED STEEL

RATINGS: 5 AMPS @ 120/240 VAC  
 5 AMPS @ 30 VDC

TERMINATION WIRE LENGTHS

-L1 = 6" Leads

-L2 = 12" Leads

-L3 = 18" Leads

-L4 = 24" Leads

(CONTINUES IN 6" INCREMENTS)

OPERATION: STEEL BALL ACTUATED SUBMINITURE SNAP ACTION SWITCH

OPERATING ANGLE 25° MAX: SWITCHES AT OR BEFORE 15° BELOW HORIZONTAL  
 & AT OR BEFORE 10° ABOVE HORIZONTAL

Contactors - Relays - Switches

<http://www.mdious.com>