

2PSS60A25

Solid State Relays

3-Phase with Integrated Heatsink

MDI



- 2-pole AC switching solid state contactors
- Product width 2.13" (54 mm)
- Rated operational voltage: 600 VAC
- **Line & Load accepts:** 10-14 AWG
- Rated operational current: up to 25 AAC
- Control voltages: 20-275 VAC (24-190 VDC)
- 1,800 A²s for I²t
- Motor ratings up to 9 kW / 10 HP @ 600 VAC
- Integrated varistor protection on output
- UL, cUL Listing
- 100 kA Short Circuit Current Rating according to UL 508
- DIN or panel mount
- RoHS compliant

Product Description

This product is intended to replace mechanical contactors especially when switching is frequent.

Switch ON occurs at the voltage zero cross and switch OFF occurs at the current zero cross. Apart from resistive and slightly inductive loads, the 2PSS60A25 is certified for motor switching with associated motor ratings. Varistors are integrated for output overvoltage protection. A green LED gives indication of control voltage presence.

Specifications are at a surrounding temperature of 25°C unless otherwise specified.

General Specifications

		2PSS60A25
Latching voltage (across each pole L-T)		<20V
Operational frequency range		45 to 65Hz
Power factor		>0.5 at rated voltage
CE marking		Yes
Touch protection		IP20
LED status indication		
	Control ON	Green, full intensity
Pollution degree		2 (non-conductive pollution with possibilities of condensation)
Over-voltage category		III (fixed installations)
Isolation		
	Input & Output to Case	4000 Vrms
	Input to Output	4000 Vrms

Output Voltage Specifications

		2PSS60A25
Operational voltage range, Ue		42-600 VAC -15% / +10% on max
Blocking voltage		1200 Vp
Internal varistors (across each pole)		625 V



Output Specifications: 2PSS

	2PSS60A25
Rated operational current per pole ⁷ AC-51 @ Ta=25°C AC-51 @ Ta=40°C AC-53a @ Ta=40°C	32 AAC 27 AAC 11.5 AAC
No. of motor starts ⁸ (x: 6, Tx: 6s, F: 50%) @ 40°C	30
Minimum operational current	250 mA
Rep. overload current (Motor rating) UL 508: Ta=40°C, t _{ON} =1s, t _{OFF} =9s, 50 cycles	61 AAC
Maximum transient surge current (I _{TSM}), t=10ms	600 Ap
I ² t for fusing (t=10ms) Minimum	1800 A ² s
Critical dv/dt (@ Tj init = 40°C)	1000 V/us


7: Refer to Derating Curves
8: Overload cycle definition, x: multiple of AC-53a, Tx: duration of current surge, F: duty cycle

Motor Ratings: HP (UL 508) / kW (EN/IEC 60947-4-2) @ 40°C


	115 VAC	230 VAC	400 VAC	480 VAC	600 VAC
2PSS60A25	1½ HP / 1.1 kW	3 HP / 3.0 kW	5 HP / 5.5 kW	7½ HP / 5.5 kW	10 HP / 9.0 kW

Control Specifications (A1, A2)


	2PSS60A25
Control voltage range, Uc	20-275 VAC, 24 (-10%) -190 VDC
Pick-up voltage	20 VAC/DC
Drop-out voltage	5 VAC/DC
Maximum reverse voltage	-
Maximum response time	2 cycles @ 230 VAC / 110 VDC
Input current @ 40°C	See diagrams below

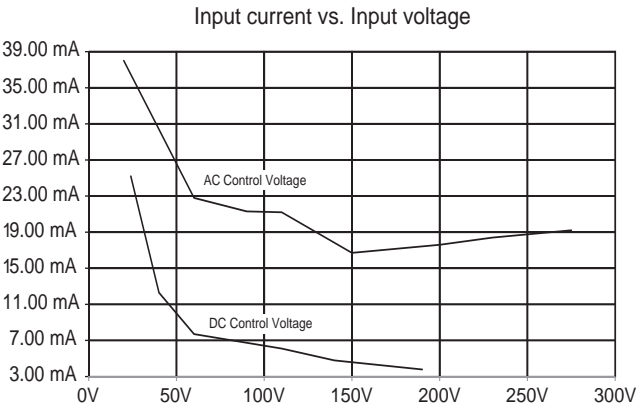

Output Power Dissipation

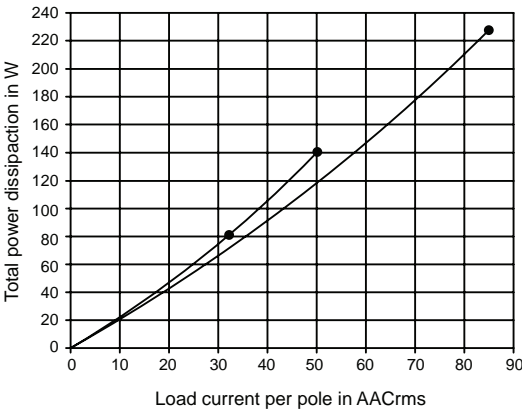


Current Derating

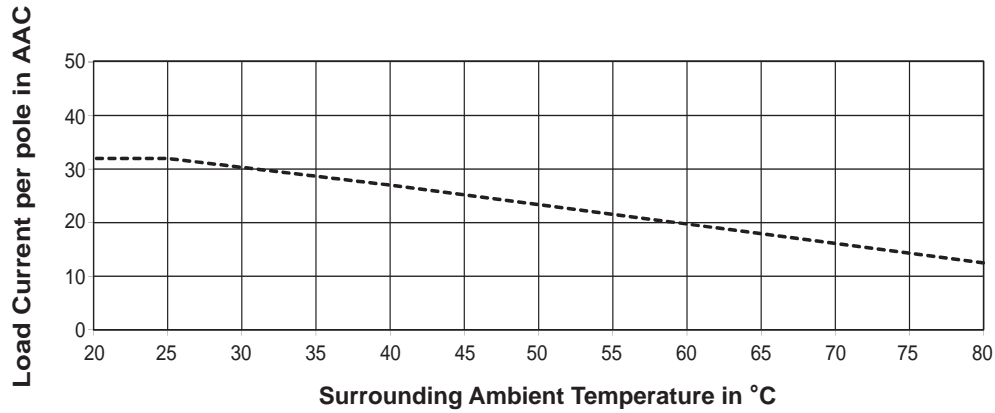

Filtering - EN/IEC 55011 Class A Compliance

Part Number	Suggested filter for compliance	Maximum heater current
2PSS60A25	220 nF / 760V / X1	25 AAC

Filter Connection Diagrams

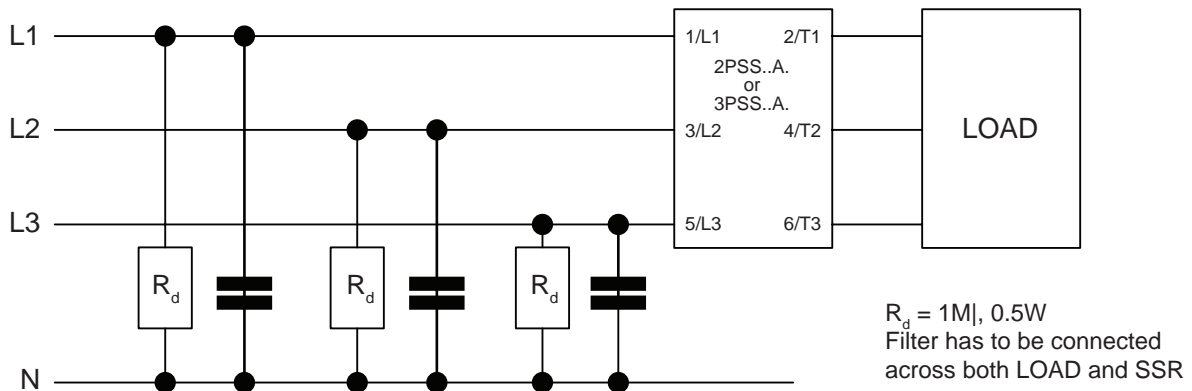



Agency Approvals and Conformance

Conformance



EN/IEC 60947-4-2
EN/IEC 60947-4-3

Agency Approvals

UL listed (E172877), UL508
cUL Listed (E172877),
C22.2 No.14-10

Short Circuit Current rating

100kArms, UL508

Electromagnetic Compatibility

EMC immunity	EN/IEC 60947-4-2	Radiated radio frequency immunity	EN/IEC 61000-4-3
Electrostatic discharge (ESD) immunity	EN/IEC 61000-4-2	10 V/m, 80 - 1000 MHz	Performance Criteria 1
Air discharge, 8 kV	Performance Criteria 2	10 V/m, 1.4 - 2.0 GHz	Performance Criteria 1
Contact, 4 kV	Performance Criteria 2	10 V/m, 2.0 - 2.7 GHz	Performance Criteria 1
Electrical fast transient (Burst) immunity	EN/IEC 61000-4-4	Conducted radio frequency immunity	EN/IEC 61000-4-6
Output: 2 kV, 5 kHz	Performance Criteria 1	10 V/m, 0.15 - 80 MHz	Performance Criteria 1
Input: 1 kV, 5 kHz	Performance Criteria 1	Voltage dips immunity	EN/IEC 61000-4-11
Signal: 1 kV, 5 kHz .PSS...-..M	Performance Criteria 1	0% for 0.5 / 1cycle	Performance Criteria 2
Electrical surge immunity	EN/IEC 61000-4-5	40% for 10 cycles	Performance Criteria 2
Output, line to line, 1 kV	Performance Criteria 1	70% for 250 cycles	Performance Criteria 2
Output, line to earth, 2 kV	Performance Criteria 1	Voltage interruptions immunity	EN/IEC 61000-4-11
Input, line to earth, 1 kV (A1, A2)	Performance Criteria 2	0% for 5000 ms	Performance Criteria 2
EMC emission	EN/IEC 61000-6-4	Radio interference field emission (radiated)	EN/IEC 55011
Radio interference voltage emission (conducted)	EN/IEC 55011	30-1000 MHz	Class A (Industrial)
0.15-30 MHz	Class A (Industrial) with filters - see filter information		

Note:

- Control input lines must be installed together to maintain products susceptibility to Radio Frequency Interference.
- Use of AC solid state relays may according to the application and the load current, cause conducted radio interferences. Use of mains filters may be necessary for cases where the user must meet E.M.C requirements. The capacitor values given inside the filtering specification tables should be taken only as indications, the filter attenuation will depend on the final application.
- This product has been designed for Class A equipment. Use of this product in domestic environments may cause radio interference, in which case the user may be required to employ additional mitigation methods.
- Surge tests on 2PSS60A25 models were carried out with the signal line impedance network. In case the line impedance is less than 40Ω, it is suggested that AC supply is provided through a secondary circuit where the short circuit limit between conductors and ground is 1500VA or less.

- Performance Criteria 1 (Performance Criteria A): No degradation of performance or loss of function is allowed when the product is operated as intended.
- Performance Criteria 2 (Performance Criteria B): During the test, degradation of performance or partial loss of function is allowed. However, when the test is complete the product should return operating as intended by itself.
- Performance Criteria 3 (Performance Criteria C): Temporary loss of function is allowed, provided the function can be restored by manual operation of the control.

Environmental Specifications

Operating temperature	-40°C to +80°C (-40°F to +176°F)	Vibration resistance	
Storage temperature	-40°C to +100°C (-40°F to +212°F)	(2-100Hz, IEC60068-2-26, EN50155, EN61373)	2g per axis
Impact resistance (EN50155, EN61373)	15/11 g/ms	Relative humidity	95% non condensing @ 40°C

Environmental Specifications (continued)

UL flammability rating
(for plastic)

UL 94 V0


Installation altitude

0 - 1000m. Above 1000m
derate linearly by 1% of
FLC per 100m up to
maximum of 2000m

Weight

Approx. 600g


Terminal Layout

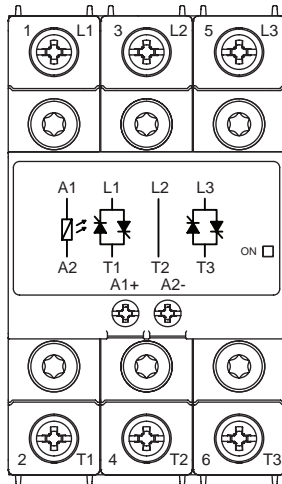

Terminals labelling:

- 1/L1, 2/L2, 3/L3: Line connections
- 2/T1, 4/T2, 6/T3: Load connections
- A1(+): Positive control signal
- A2(-): Control ground

Dimensions

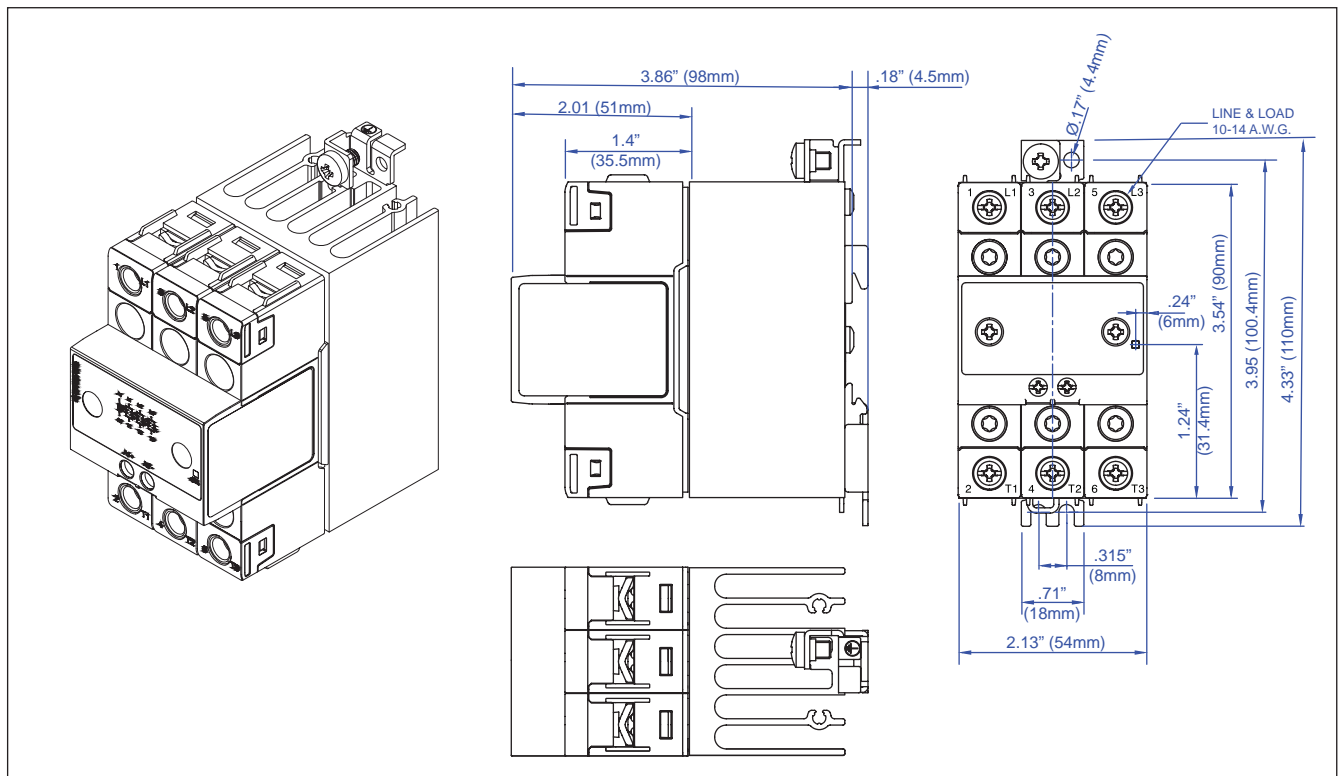



Connection Specifications






Power Connections

Use 75°C copper (Cu) conductors

1/L1, 3/L2, 5/L3, 2/T1, 4/T2, 6/T3




2PSS60A25

Stripping length (X)		.43" (12 mm)
Connection type		M4 screw with captivated washer
Rigid (solid & stranded) UL/cUL rated data		2x 2.5-6.0 mm ² 2x 14-10 AWG
Flexible With end sleeve		2x 1.0-2.5 mm ² 2x 2.5-4.0 mm ² 2x 18-14 AWG 2x 14-12 AWG
Flexible With-out end sleeve		2x 1.0-2.5 mm ² 2x 2.5-6.0 mm ² 2x 18-14 AWG 2x 14-10 AWG
Torque specification		Pozidriv 2 UL: 2.5 Nm (22 lb-in) IEC: 2.0-2.5 Nm (17.7-22 lb-in)
Aperture for termination lug		.48" (12.3 mm)
Protective Earth (PE) connection		M5, 1.5Nm (13.3 lb-in) Not provided with SSR. PE connection required when product is intended to be used in Class 1 applications according to EN/IEC 61140




Control Connections

Use 75°C copper (Cu) conductors


A1, A2





2PSS60A25

Stripping length (X)		.32" (8 mm)
Connection type		M4 screw with captivated washer
Rigid (solid & stranded) UL/cUL rated data		2x 0.5-2.5 mm ² 2x 18-12 AWG
Flexible With end sleeve		2x 0.5-2.5 mm ² 2x 18-12 AWG
Torque specification		Pozidriv 1 UL: 0.5 Nm (4.4 lb-in) IEC: 0.4-0.5 Nm (3.5-4.4 lb-in)

Connection Diagram

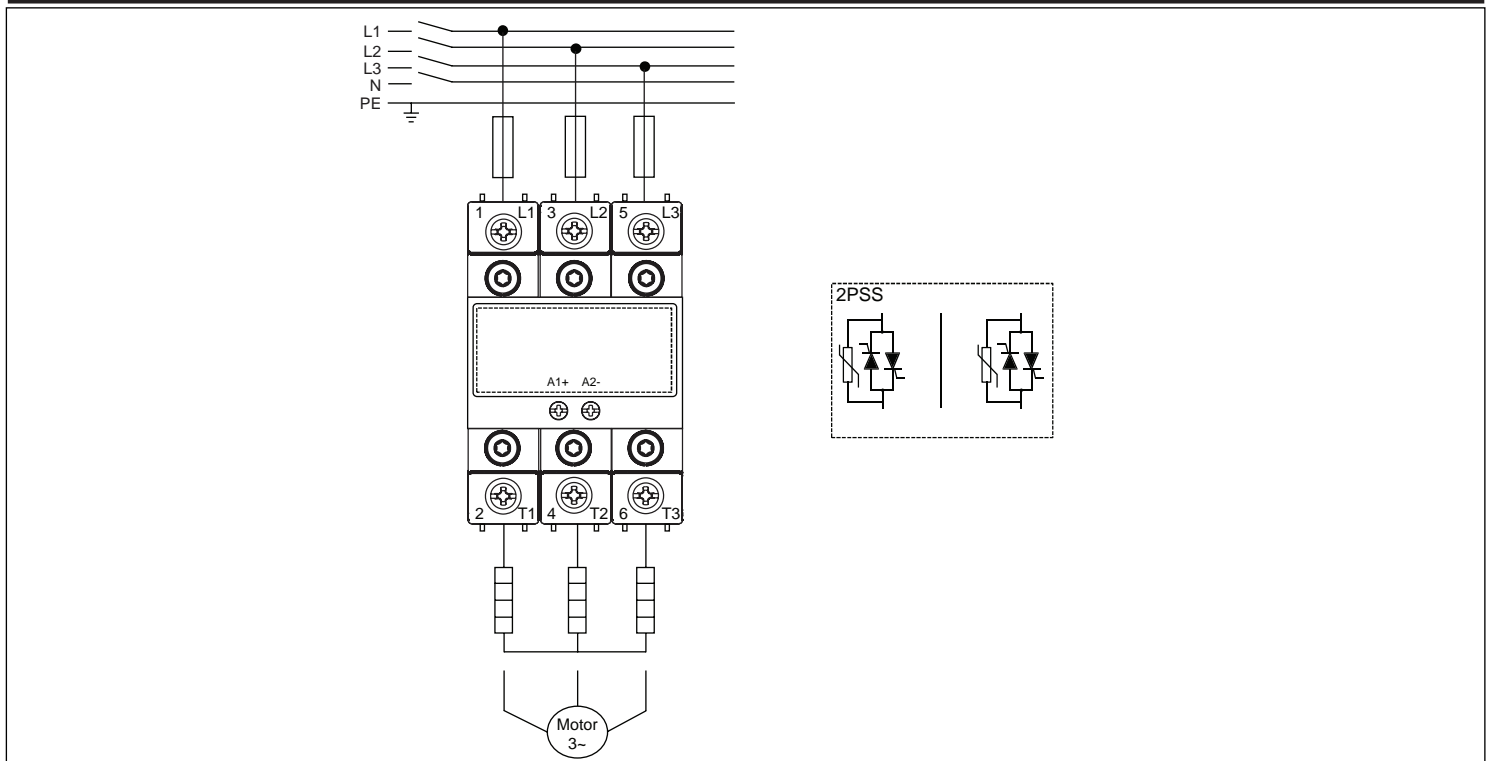

Installation Instructions

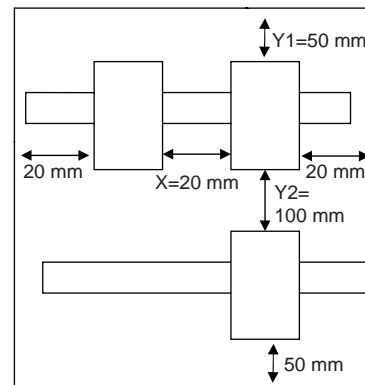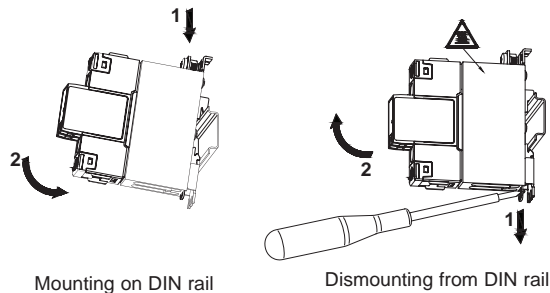

Short Circuit Protection

Protection Co-ordination, Type 1 vs Type 2:

Type one protection implies that after a short circuit, the device under test will no longer be in a functioning state. In type 2 co-ordination the device under test will still be functional after the short circuit. In both cases, however the short circuit has to be interrupted. The fuse between enclosure and supply shall not open. The door or cover of the enclosure shall not be blown open. There shall be no damage to conductors or terminals and the conductors shall not separate from terminals. There shall be no breakage or cracking of insulating bases to the extent that the integrity of the mounting of live parts is impaired. Discharge of parts or any risk of fire shall not occur.

The product variants listed in the table hereunder are suitable for use on a circuit capable of delivering not more than 100,000A ms Symmetrical Amperes. 600 Volts maximum when protected by fuses. Tests at 100,000A were performed with Class J fuses, fast acting; please refer to the tables below for maximum.

Co-ordination type 1 (UL 508)

Part No.	Max. fuse size [A]	Class	Short circuit current [kArms]	Voltage [VAC]
2PSS60A25	30	J	100	Max. 600