



MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077

1 & 2 H.P. Float switch 120 VAC - Normally Open - Wide Angle – Mechanical


Designed, utilizing a high quality snap action switch. This float switch is ideal for direct load switching applications. Rated at 15 Amps 1 H.P. @ 120 VAC.

These float switches are constructed of Acrylonitrill Butadiene Styrene (ABS) ultrasonically welded. The cord set is flexible SJOW Chlorinated Polyethylene jacketed wire sealed through the float shell with epoxy. Precision molded switch housings insure a repeatedly consistent angle.

Features:

MDI floats are not sensitive to axial rotation utilizing a snap action switch mechanically activated. Cord weights, cable ties for tethering, and plastic molded tether clamps are also available.

These floats are UL Listed and CSA Certified manufacture in accordance to Underwriters Laboratories and Canadian Standards Association for product safety.

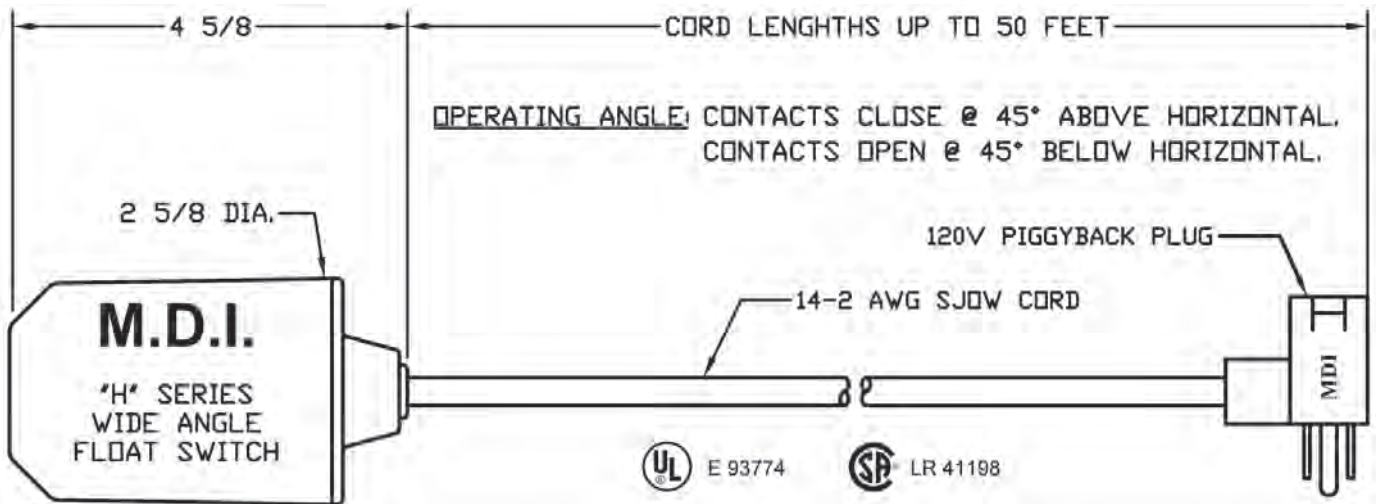

MDI Incorporated P.O. Box 710
25028 US 12 East - Edwardsburg, MI 49112
Ph: (269) 663-8574 or (800) MDI-4077
Fax: (269) 663-2924

Cat. Number	Cord Length
HF2OU10F1	10'
HF2OU20F1	20'
HF2OU30F1	30'
HF2OU40F1	40'
HF2OU50F1	50'

Contactors - Relays - Switches