



MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710


Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077



INDUSTRIAL CONTROL EQUIPMENT

330NO-24AHU

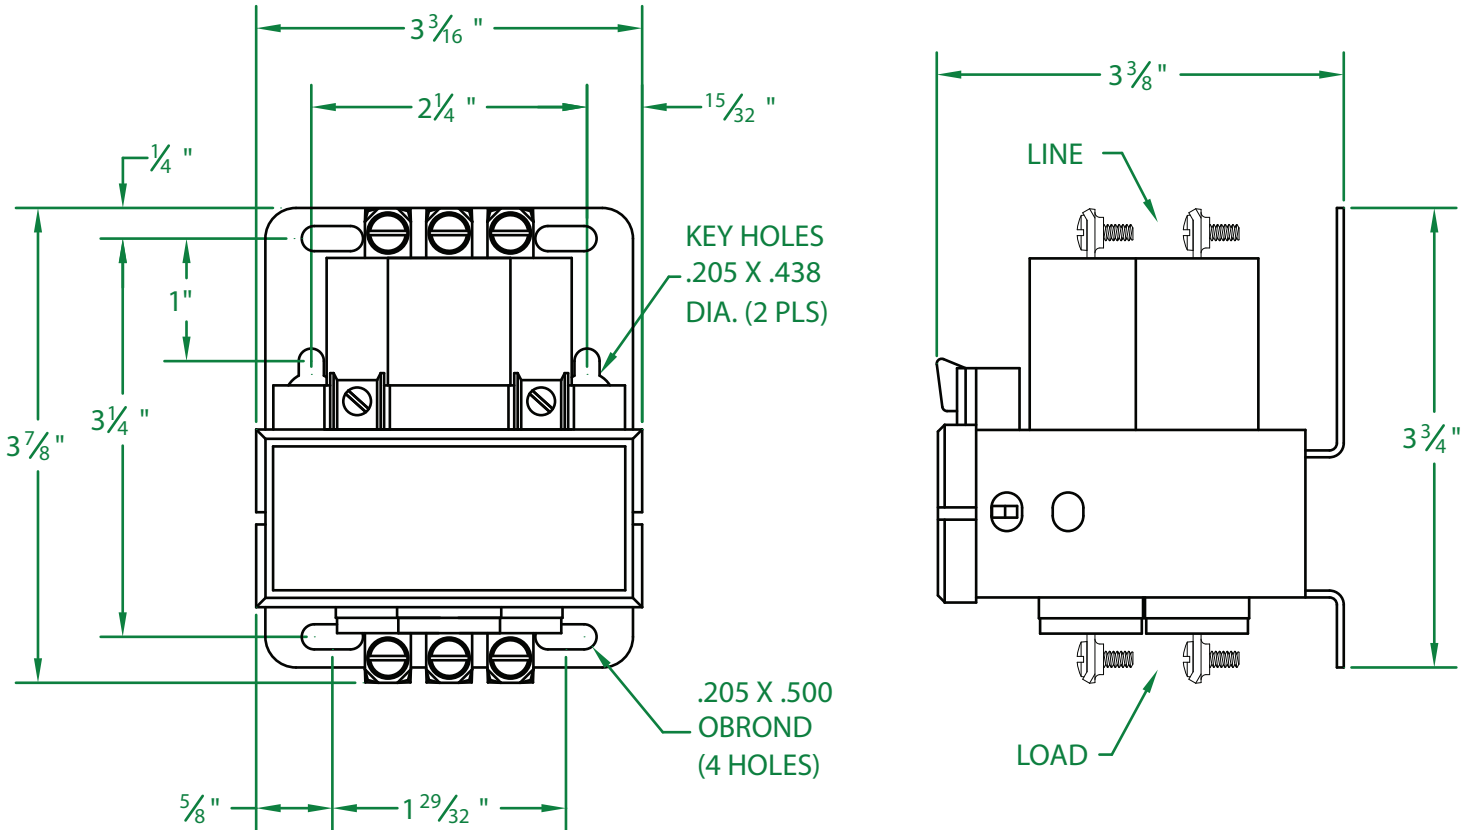

- * CONTACT RESISTANCE .003 ohms
- * DIELECTRIC WITHSTAND 2,500 VAC RMS
- * OPERATE TIME 50 MILLISECONDS
- * RELEASE TIME 80 MILLISECONDS
- * RATINGS:
 CONTACTS: 30 AMP @ 480 VAC
 RESISTIVE OR GENERAL PURPOSE
 COIL: 24V 50/60 Hz
 RESISTANCE: 7.6 Ω
 CURRENT: 815 mA
 VA: 19.6 WATTAGE: 5.0

- * TEMPERATURE RANGE -35° TO +85° C
- * COIL TERMINALS #6 BINDING HEAD SCREWS
- * LOAD TERMINALS #8 BINDING HEAD SCREWS
- * THREE POLE / SINGLE THROW
- * MAGNETICALLY ACTIVATED
- * UNIVERSAL BACKPLATE
- * MERCURY CONTACTOR

* LIFE CYCLE ENDURANCE TESTS: U.L. 508 @ 100,00 & CSA 22.2 @ 250,000 CYCLES

Contactors - Relays - Switches

<http://www.mdious.com>