





# MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077

## SP-1177

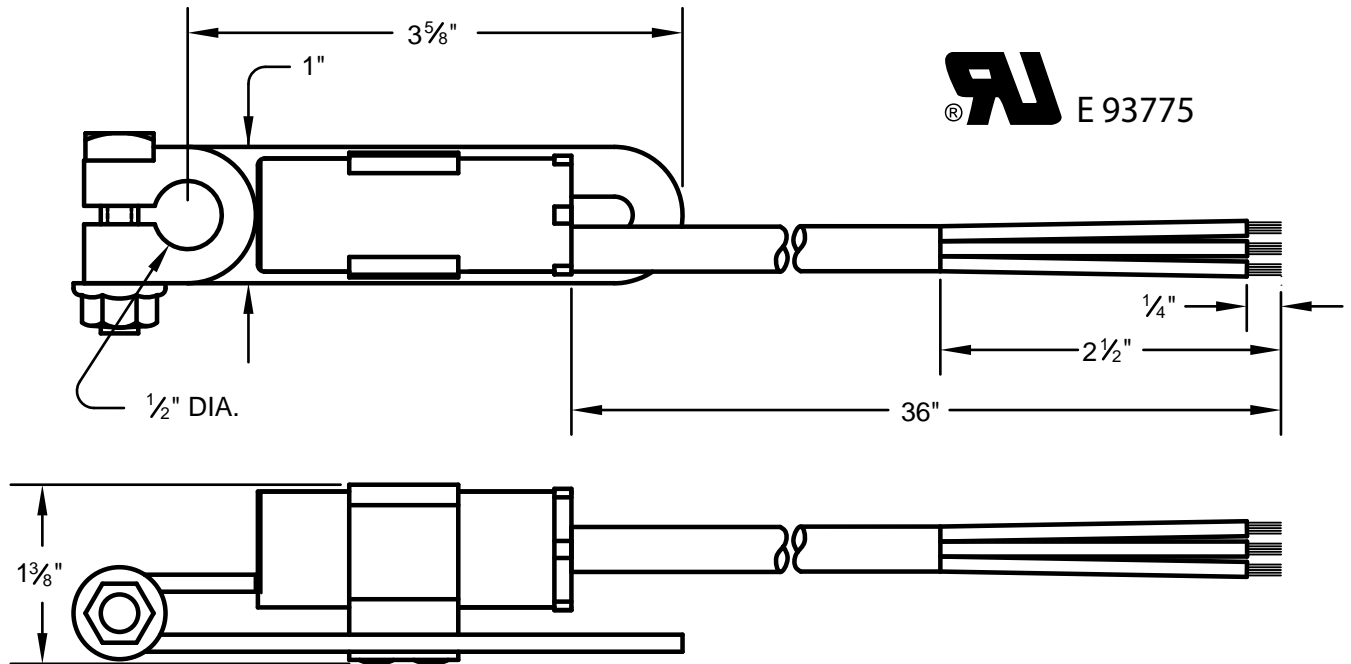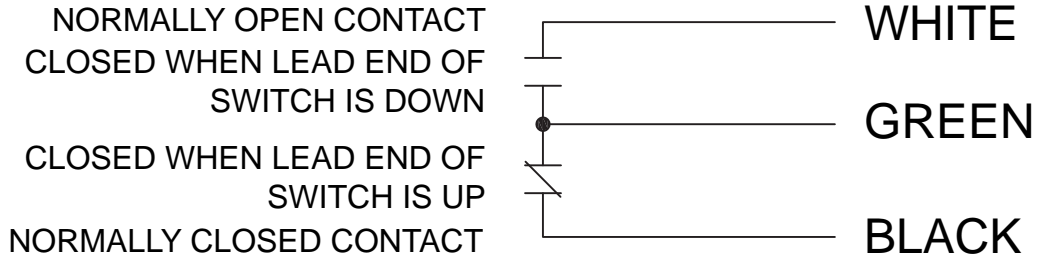

### RATINGS:

2 AMPS @ 120 VAC

1 AMP @ 240 VAC

### STORAGE:

NORMAL SHEL TYPE STORAGE,  
TEMPERATURE BETWEEN  
-38°F & 105°F

### OPERATING ANGLE:

CONTACTS OPENS/CLOSES 5° ABOVE  
HORIZONTAL OR BEFORE  
CONTACTS CLOSES/OPENS 5° BELOW  
HORIZONTAL OR BEFORE

### INSTALLATION:

MOUNT ON 1/2" SHAFT, TIGHTEN BOLT, ROUTE CORD TO AVOID PHYSICAL DAMAGE TO CORD. CONNECT WIRES BY COLOR CODE. GREEN - COMMON, WHITE - NORMALLY OPEN, BLACK - NORMALLY CLOSED.

APPLY THE SWITCH WITHIN THE RATED VOLTAGE AND CURRENT. THE UNIT CONTAINS A SMALL AMOUNT OF MERCURY. IF THE SWITCH FAILS, PLEASE RETURN IT TO MDI OR DISPOSE OF IT PROPERLY

Contactors - Relays - Switches

<http://www.mdious.com>