



MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710


Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077


SP-1335-L6

NORMALLY OPEN CONTACT
CLOSED WHEN LEAD END OF
SWITCH IS DOWN

NORMALLY CLOSED CONTACT
CLOSED WHEN LEAD END OF
SWITCH IS UP

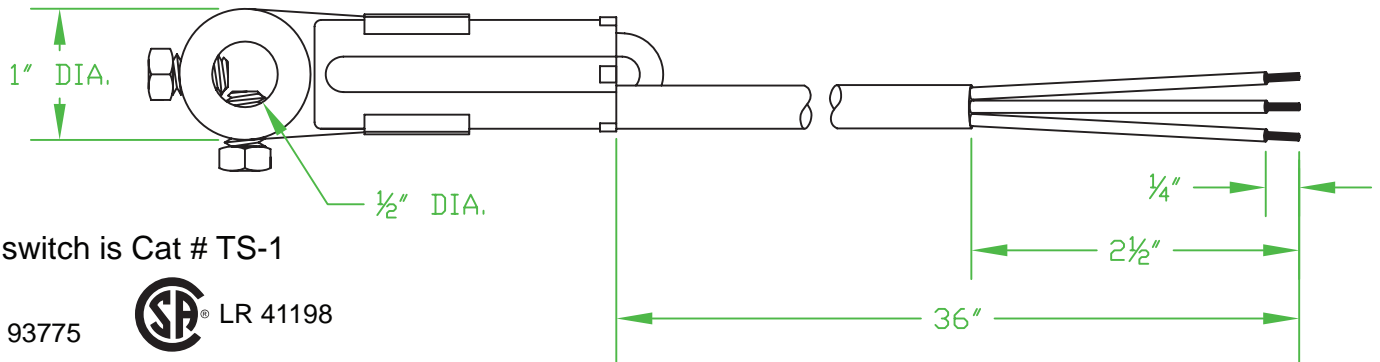

Internal switch is Cat # TS-1

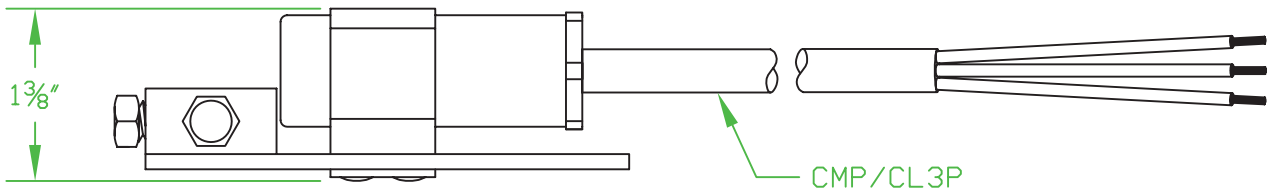

RATINGS:

1 AMP @ 120 VAC

1 AMP @ 24 VDC

STORAGE:

NORMAL SHELF TYPE STORAGE, TEMPERATURE
BETWEEN -38°F AND 105°F

INSTALLATION:

MOUNT ON 1/2" SHAFT, TIGHTEN BOLT, ROUTE WIRE TO AVOID PHYSICAL DAMAGE TO WIRES. CONNECT WIRES BY COLOR CODE. BLACK - COMMON, RED - NORMALLY OPEN, WHITE - NORMALLY CLOSED.

APPLY THE SWITCH WITHIN THE RATED VOLTAGE AND CURRENTS. THE UNIT CONTAINS A SMALL AMOUNT OF MERCURY. IF THE SWITCH FAILS, PLEASE RETURN IT TO MDI OR DISPOSE OF IT PROPERLY.

Contactors - Relays - Switches

<http://www.mdius.com>