




MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077

MECHANICAL DAMPER ARM SWITCH SP-1347-L6

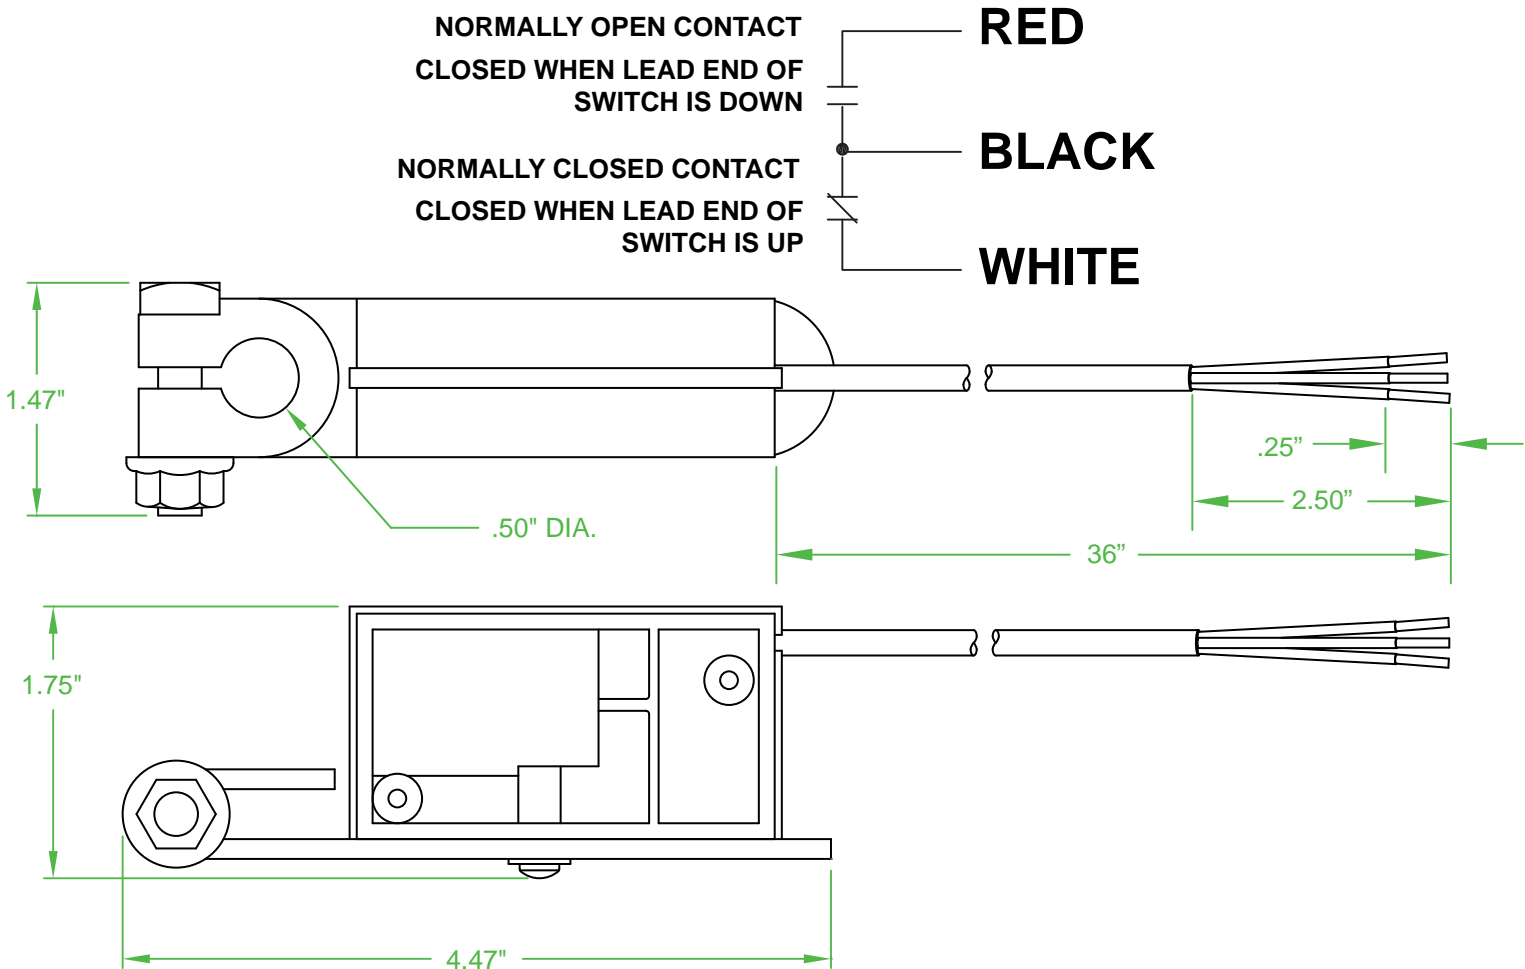

WIRE: 18/3 CMP/CL39 PLENUM WIRE

HOUSING MAT'L: GLASS FILLED PBT

BRACKET MAT'L: PLATED STEEL

RATINGS: 5 AMPS @ 120/240 VAC
5 AMPS @ 30 VDC

INSTALLATION:

MOUNT ON 1/2" SHAFT, TIGHTEN BOLT, ROUTE WIRE TO AVOID PHYSICAL DAMAGE TO WIRES. CONNECT WIRES BY COLOR CODE. BLACK - COMMON, RED - NORMALLY OPEN, WHITE - NORMALLY CLOSED.

APPLY THE SWITCH WITHIN THE RATED VOLTAGE AND CURRENTS.

OPERATION: STEEL BALL ACTUATED SUBMINITURE SNAP ACTION SWITCH

OPERATING ANGLE 25° MAX: SWITCHES AT OR BEFORE 15° BELOW HORIZONTAL & AT OR BEFORE 10° ABOVE HORIZONTAL

Contactors - Relays - Switches

<http://www.mdious.com>