




MERCURY DISPLACEMENT INDUSTRIES, INC.

Post Office Box 710 - U.S. 12 East - Edwardsburg, Michigan 49112-0710

Phone (269) 663-8574 - Fax (269) 663-2924

(800) 634-4077

SP-1455-L*

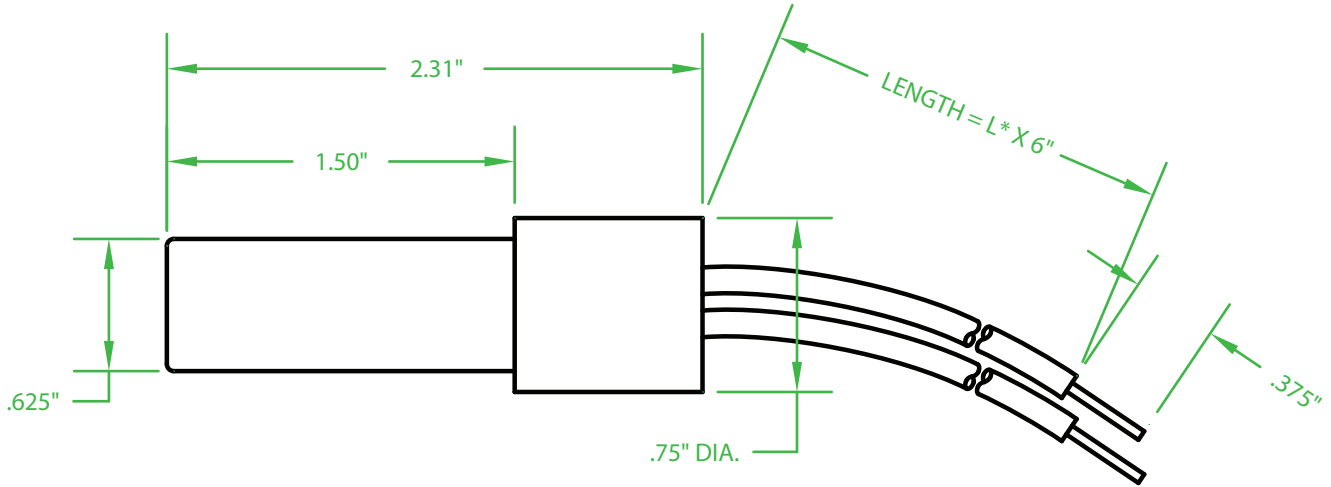

NON-MERCURY TILT SWITCH

WIRE: 17 AWG 210 STRAND GREY
SILICONE RUBBER

CASE: VALOX 420.

RoHS COMPLIANT

Switching Voltage: 6-24Vdc Max.

Switching Current: 1.0A Max.

Differential Angle: 15° Max.

SP-1455-*


L1 = 6"

L2 = 12"

L3 = 18"

L4 = 24"

L5 = 30"

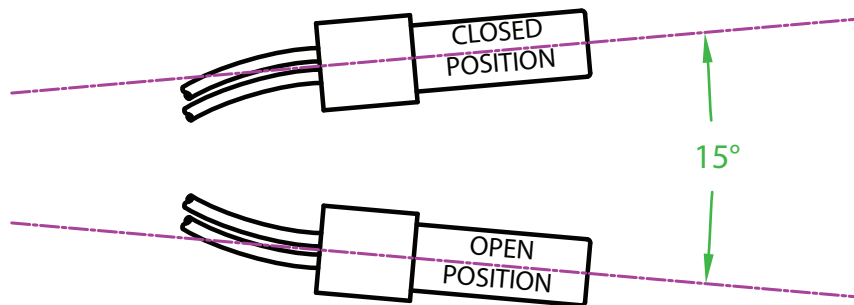

OPERATING ANGLE: CONTACTS OPENS @ 7.5° ABOVE HORIZONTAL OR BEFORE
CONTACTS CLOSE @ 7.5° BELOW HORIZONTAL

Contactors - Relays - Switches

<http://www.mdius.com>

J.J.S. March 19, 2014

Rev. A 10-10-17